

**Model: 70PzV500**

**Ares series**

Ares range battery adopts traditional tubular gel technology, adopts patent gel electrolyte. The products are used as standby power for communication, power, military and broadcast and television system. They possess precise ABS heat seal technology between container and lid and patented post seal structure. Provide better deep cycle performance versus AGM. The design float life is 18+ years.



**Specifications**

Battery Model	70PzV500
Nominal Voltage	2V
Rated Capacity	500Ah (10hour rate) to 1.80V/cell @25°C(77°F)
Typical Weight	41kg
Internal Resistance	Approx 0.50mΩ
Operating Temperature Range	Operation(maximum) : -40°C to 55°C(-40°F to 131°F)
	Operation(recommended) : 15°C to 25°C(59°F to 77°F)
	Storage : -20°C to 40°C(-4°F to 104°F)
Float Voltage	2.25V/cell@25°C(77°F)
Recommended Maximum Charging Current Limit	125A
Equalize and Cycle Service	2.35V~2.40V/cell@25°C(77°F)
Self Discharge	The residual capacity is above 94% after 90 days storage(25°C/77°F)
Terminal	M8 Female Large Size Copper Post
Terminal Hardware Torque	15 ± 1.0Nm
Container Material	ABS (V0 optional)






**Constant Current Discharge Characteristics Units: Amperes (25°C, 77°F)**

End voltage per cell	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	24h	48h	100h
1.60V	543	433	297	184	133	105	90.3	79.4	64.0	52.5	23.5	12.9	7.24
1.65V	524	419	290	180	131	104	89.3	78.5	63.5	52.2	23.5	12.8	7.13
1.70V	493	402	281	176	129	103	88.1	77.2	62.8	52.0	23.3	12.7	7.02
1.75V	468	387	273	172	126	101	86.6	75.7	61.6	51.2	22.8	12.6	6.83
1.80V	413	354	260	165	123	98.8	84.6	73.8	60.2	49.7	22.3	12.3	6.62
1.85V	347	298	242	156	119	95.8	81.9	71.3	58.5	49.0	21.6	11.7	6.40
1.90V	262	254	193	136	106	89.1	76.2	65.8	53.0	44.1	19.8	11.0	5.90

**Discharge Data with Constant Power Units: Watts per cell (25°C, 77°F)**

End voltage per cell	15min	30min	1h	2h	3h	4h	5h	6h	8h	10h	12h	24h
1.60V	1086	860	658	361	275	218	183	160	132	111	95.0	48.5
1.65V	1034	814	612	359	273	217	182	159	131	110	94.4	48.1
1.70V	987	777	573	354	269	214	180	157	129	108	93.1	47.5
1.75V	934	746	540	344	262	205	173	154	127	106	91.8	46.8
1.80V	874	716	509	332	255	200	165	147	121	101	85.9	46.0
1.85V	818	688	474	319	243	191	161	141	118	96.8	82.7	44.8
1.90V	764	628	422	290	234	200	167	134	112	87.8	75.5	42.7

Dimensions-mm[inch]

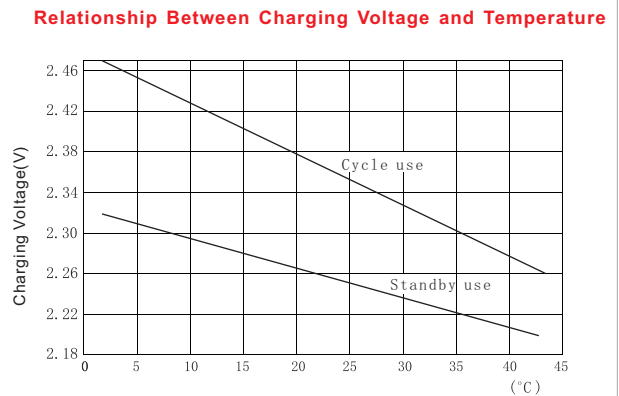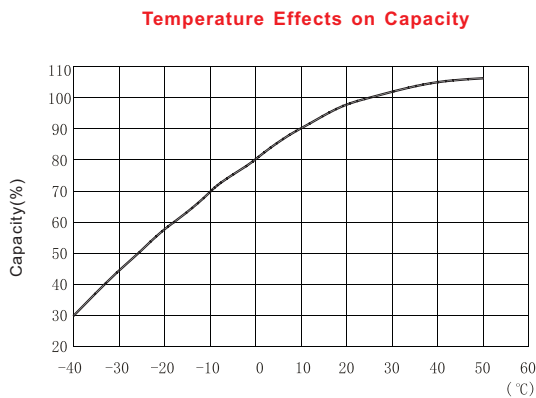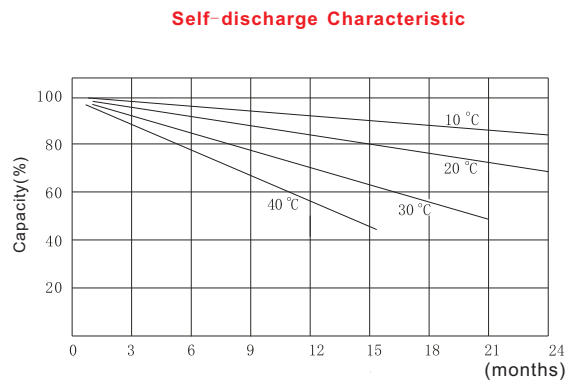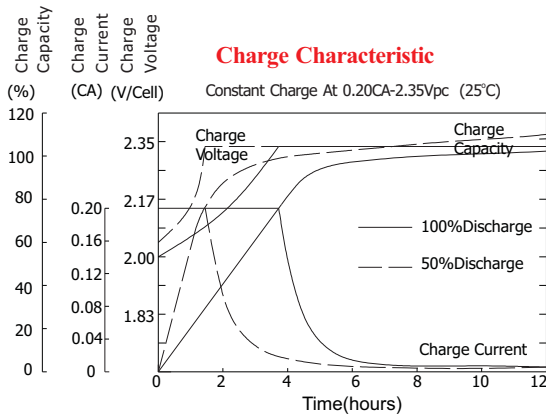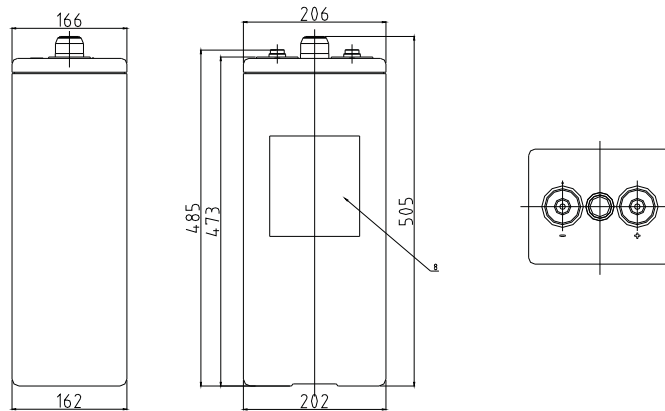

**NARADA POWER SOURCE CO.,LTD.**  
 No.459 Wensan Road, Hangzhou, Zhejiang, P.R.China  
 Tel:+86-571-28827013 Fax:+86-571-85126942  
 Website:www.naradabattery.com E-mail: intl@narada.biz

**NARADA ASIA PACIFIC PTE.LTD.**  
 65 Ubi Crescent #07-05 HOLA centre, Singapore  
 Tel: +65-6848 1191 Fax: +65-6749 3498  
 E-mail: sales@narada.com.sg

**NARADA EUROPE (UK) LIMITED**  
 Spectrum House, Dunstable Road, Redbourn,  
 St. Albans, Herts AL3 7PR  
 Tel: +44 (0)845 371 7095 Fax:+44 (0)845 612 2031  
 E-mail: sales@naradaeurope.com

